



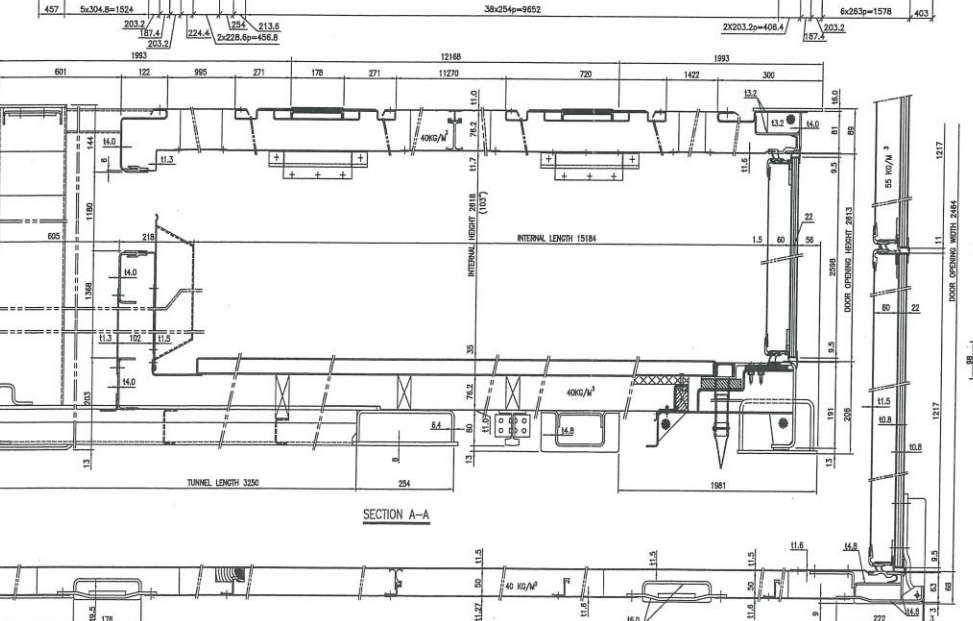




PART NAME	MATERIAL	REMARK
FRAME		
SIDE TOP RAIL	A8015-76	
SIDE BOTTOM RAIL	A8015-76	
CROSS MEMBER	A8015-76	
CORNER POST	A572-50	
INTERMEDIATE FRAME	A572-50	
END FRAME	A572-50	
PANEL		
ROOF	A3303-116	BAVE
SIDE/FRONT	A3304-1091	P.P WHITE
DOOR	A5050P-104	P.P WHITE
ROOF	VERISTEX	
SIDE	VERISTEX	
DOOR	VERISTEX	
INSIDE LINING		
MAN	VERISTEX	
SUB-FLOOR		
TUNNEL PARTS	A3303-116	
FLOOR	A8015-76	
CORNER FITTING	SCW 480	
DOOR HARDWARE	SCW-IN 2577 TYPE	
REEFER MACHINE	CARRIER/TX	

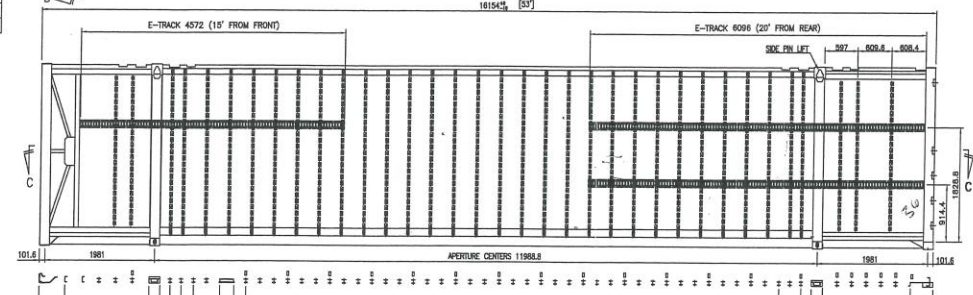

- PAINTED SURFACE
- ALUMINUM SHEET
- ROOF PANEL : BAVE
- SIDE PANEL : PRE-PAINTED WHITE
- DOOR PANEL : PRE-PAINTED WHITE
- STEEL PART
- PRIMER: EPOXY ZINC PRIMER
- TOP: URETHANE
- BLANKET COATING (ONLY STEEL PART)
- PRIMER: EPOXY ZINC PRIMER
- TOP: BROWN/BLK.

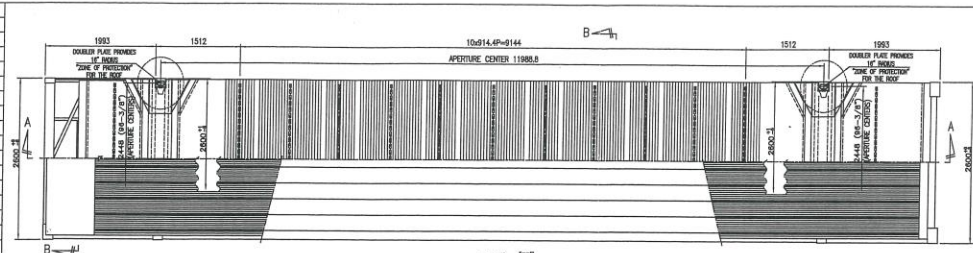

CLASSIFICATION	DIMENSION	
	LENGTH	DIMENSION
EXTERNAL	LENGTH	16154 MM 53'
	WIDTH (AT 40' POSITION)	2900 MM 9' 6"
	HEIGHT	2800 MM 9' 3/8"
INTERNAL	LENGTH	15184 MM 49' 9-13/16"
	WIDTH	2479 MM 8' 1-1/2"
	HEIGHT	2813 MM 9' 7"
DOOR OPENING		
WIDTH		2448 MM 8' 1"
HEIGHT		2813 MM 9' 7"
INTERNAL CUBIC CAPACITY		95.6 M ³ 3400 FT ³
MAX GROSS WEIGHT		35480 KGS 77200 LBS
TARE WEIGHT		5070 KGS 11180 LBS
±2% EXCLUDING LIMIT		6000 KGS 13200 LBS
MAX PAY LOAD		24480 KGS 53970 LBS
FLOOR STRENGTH		8180 KGS 18000 LBS
STACKING TEST LOAD 40' POSITION (20%Y)		22800 KGS 50000 LBS

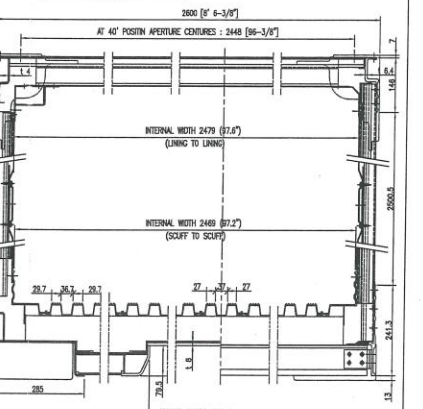

MARK	DATE	DETAIL OF REVISION	CHECKED	APPROVED
TYPE		53' REEFER D/C		
APPROVED		TITLE		
CHECKED		GENERAL ASSEMBLY		
DRAWN		DATE		
		JUN.24.11		
		SCALE		
		NONE		
		SHEET		
		1 OF 1		
UNLESS OTHERWISE SPECIFIED DIMENSIONS IN MM TAKE PRECEDENCE OVER DECIMALS ANGLES XX ±1.5 MM ±1 DEGREE		SAP NUMBER		
		N/A		
		DRAWING NUMBER		
		3-001023		
		REVISION		
		A		

HYUNDAI TRANSLEAD OWNS PROPRIETARY RIGHTS TO THE INFORMATION DISCLOSED. IT IS ISSUED FOR ENGINEERING INFORMATION ONLY AND MAY NOT BE REPRODUCED OR MANUFACTURED WITHOUT PERMISSION FROM HYUNDAI TRANSLEAD